


▶ Product Specification

- ▶ Full automatic opening/closing speed 50cm/sec - 120cm/sec, same speed up and down.
- ▶ The frequency conversion four sections control fast, may make the entire region speed regulation, enables the gate the operation to meet the smooth durable requirements.

Material:

- High-strength beam design, not fearing strong wind. (up to 9-degree wind)
- Door surface material is constituted by high-tension fibers, density 1000den, 2-degree fire-proof, anti-static and anti-UV PVC. The bottom is a special air-cushion material.
- 628mm-in-outer-diameter ultra-big aluminum alloy reel, to prolong the use life of the door PVC in coiling and stretching.
- 0.8mm thick polyester yara encapsulated vinyl sheet (fire resistant).

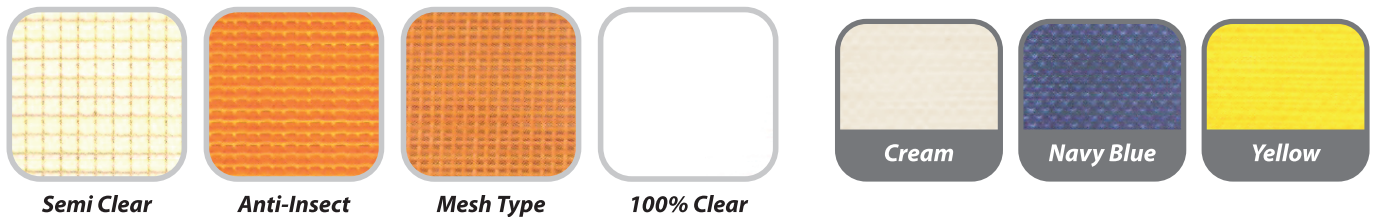


Transmission:

- Power supply : AC220V, 3 (single-phase), 50HZ.
- Conceal motor reduces pollution, maintenance free, safety, durable, longer motor lifetime.
- Motor transmission adopts a roller-type planetary gear structure to prolong use life and diminish noise.
- Full-sealed planetary roller-type transmission automatically lubricates without the need of maintenance to reduce the cost of repairs.
- High precisely adjusts with the spindle, may increase the bearing the service life.
- Full-cover axis transmission is several times a 1 : 1 gear or chain transmission means in use life.
- Transmission horsepower is small to develop maximum energy-saving efficiency and save electricity expense.
- The motor uses the aluminum alloy outer covering, the radiation is good, does not rust, the service life increases.

Induction:

- Automatic disconnection protective device, obstacle detection safety device.
- Multifunction electronic control panel, IR electric eye, manual switch.

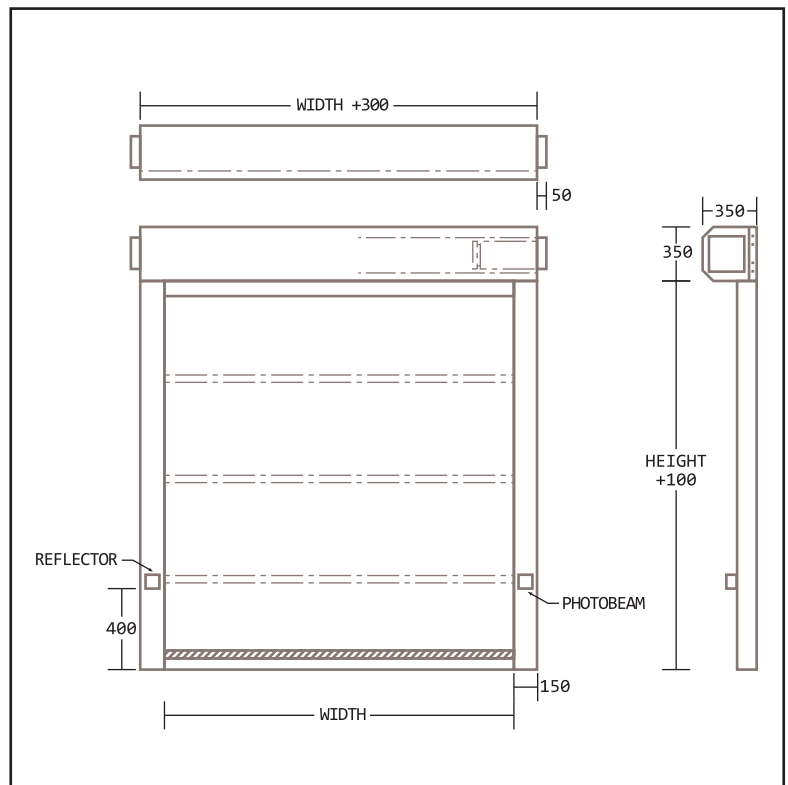

DESCRIPTION		BD1	BD2	BD3	BD4
Dimension	Width	W900~W2000mm	W2100~W3500mm	W3600~W5000mm	W5000~W6500mm
	Height	H1000~H5200mm	H1000~H5200mm	H1000~H5200mm	H1000~H6000mm
Height of Motor Drumbox		300mm, 330mm, 350mm			
Width of Guiderail		100mm~150mm			
Power Consumption		AC 220V single phase 50HZ			
Open/Close Speed		80~120cm/sec	70~100cm/sec	60~120cm/sec	50~80cm/sec