




### Technical specifications 60W

| TYPE                | Single leaf slide               | Double leaf slide |
|---------------------|---------------------------------|-------------------|
| Model               | MY-60S                          | MY-60D            |
| Power supply        | AC 240V (50Hz)                  |                   |
| Controller          | Micro-Processor Control         |                   |
| DC geared motor     | DC 24V 60W Geared Motor         |                   |
| Drive               | S8M Timing Belt                 |                   |
| Maximum door weight | <del>100</del> 120Kg X 1        | 80Kg X 2          |
| Opening speed       | 350mm~1000mm / sec (Adjustable) |                   |
| Closing speed       | 150mm~850mm / sec (Adjustable)  |                   |
| Min~Max clear width | 700mm~1200mm X 1                | 500mm~1100mm X 2  |
| Hold open time      | 0~20 sec                        |                   |
| Safety funtion      | Safety reverse                  |                   |
| Ambient temp        | -30°C ~ +50°C                   |                   |

### Technical specifications 90W

| TYPE                | Single leaf slide               | Double leaf slide        |
|---------------------|---------------------------------|--------------------------|
| Model               | MY-90S                          | MY-90D                   |
| Power supply        | AC 240V (50Hz)                  |                          |
| Controller          | Micro-Processor Control         |                          |
| DC geared motor     | DC 24V 90W Geared Motor         |                          |
| Drive               | S8M Timing Belt                 |                          |
| Maximum door weight | <del>120</del> 200Kg X 1        | <del>100</del> 150Kg X 2 |
| Opening speed       | 350mm~1000mm / sec (Adjustable) |                          |
| Closing speed       | 150mm~850mm / sec (Adjustable)  |                          |
| Min~Max clear width | 1000mm~3000mm X 1               | 1000mm~3000mm X 2        |
| Hold open time      | 0~20 sec                        |                          |
| Safety funtion      | Safety reverse                  |                          |
| Ambient temp        | -30°C ~ +50°C                   |                          |

### CONTROLLER

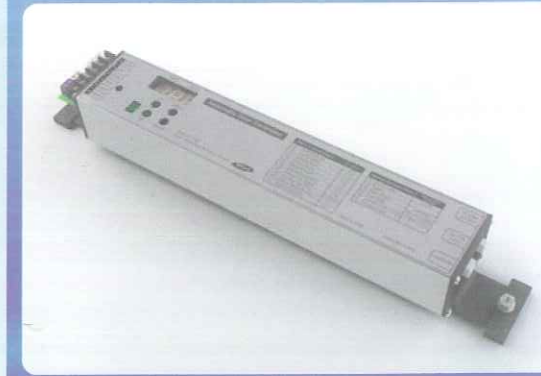

- Digital setting and Self error monitoring.
- One controller for both 60W & 90W motor
- Door open holding function & Smart door width change (50%, 70%, 100%)
- Safety door reverse function (failsafe)

### Aluminium Track Profile



- Separate running rail
- Wall mounted system

### DC MOTOR



- Strong durability and quiet operation
- Motor lock built in type (optional)
- High efficient low heat motor & different gear ratio is possible

### TIMING BELT




- Smooth and low noise type
- Powerful S8M timing belt

### IDLE PULLEY



- Low vibration design
- Easy to adjust timing belt tension

### HANGER ROLLER

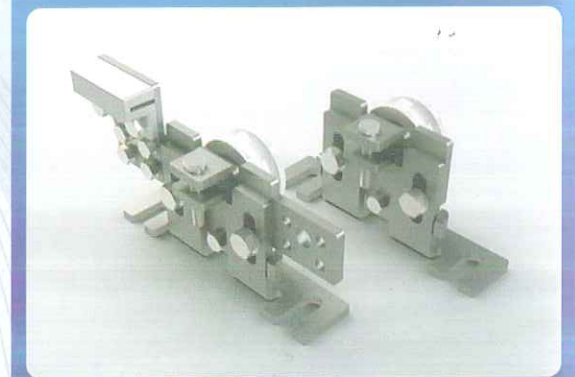

- Optimized low running noise and strong durability design
- Derailment prevention structure
- Door vertical height adjust design